

PS6-HH ABC

ABC POWDER FIRE EXTINGUISHER

CONSTRUCTION

BODY • 160 mm diameter, deep drawn mild steel cylinder, MIG welding externally painted with polyester resin, signal red to RAL 3000. CE marking.

VALVE • Lever operated with nickel plated brass body. CE marking.
All external parts are protected against corrosion.

PROPELLANT • The propellant gas is nitrogen. A small percentage of helium is added, to facilitate electronic leak detection.

EXTINGUISHING AGENT • ABC multipurpose dry powder.

All parts in contact with the extinguishing agent are compatible with the same.

HOSE • Reinforced rubber hose with pressure connections, complete with nozzle.

BRACKET • Mild steel, zinc-plated wall bracket suitable for vertical mounting.

Transport bracket available on request.

USE

Suitable for all fires (except metal fires).



PS6-HH ABC is a stored pressure, multi-purpose dry powder fire extinguisher with pressure gauge. Wide operating temperature range $-30\text{ }^{\circ}\text{C}$ $+60\text{ }^{\circ}\text{C}$, ensuring suitability for use in low-temperature countries.

Certified to the Pressure Equipment Directive PED 97/23/EC, to the Marine Equipment Directive MED 96/98/EC and CEN EN3.

100% of the fire extinguishers are checked by an electronic helium leak detection system.

Capacity is 6 kg.

FIRE CLASSES



34

233



PRODUCT CERTIFICATION



PS6-HH ABC


ABC POWDER FIRE EXTINGUISHER

TECHNICAL CHARACTERISTICS

MODEL:	PS6-HH ABC	INT ING 4
FIRE RATINGS:	34A 233B C	
CHARGE:	6 kg ± 2%	
PROPELLANT:	Nitrogen or nitrogen + helium	
EXTINGUISHING AGENT:	ABC dry powder	
DISCHARGE:	Discharge time :	~ 18 s
CYLINDER:	Material of construction :	Steel
	Manufacturing process :	Deep drawing and MIG welding
	External painting :	Polyester resin, minimum thickness 75 micron
	Corrosion resistance :	480 h minimum according to ISO 9227:1990
HOSE	Reinforced rubber tube with nozzle	Reinforced rubber tube with nozzle.
	Overall length :	565 mm
PRESSURE:	Operating pressure, 20 °C :	13 bar
	Operating pressure, 60 °C :	15 bar
	Operating pressure, -30 °C :	11 bar
DIMENSIONS:	Overall height :	525 mm
	Bottle OD :	160 mm
WEIGHT:	Empty / Charged:	2,6 kg / 8,6 kg
PACKING SPECIFICATIONS:	Standard packing :	Single piece cardboard box
	Carton size : B x L x H :	175 x 175 x 525 mm
	Weight per carton :	9 kg
	Pallet :	81 cartons
	Pallet size : B x L x H :	800 x 1200 x 1725 mm
	Pallet volume :	1,7 m3
	Weight per pallet (net/gross):	729 kg / 749 kg

© REPRODUCTION IS FORBIDDEN

32.895E.01.09.2014.C

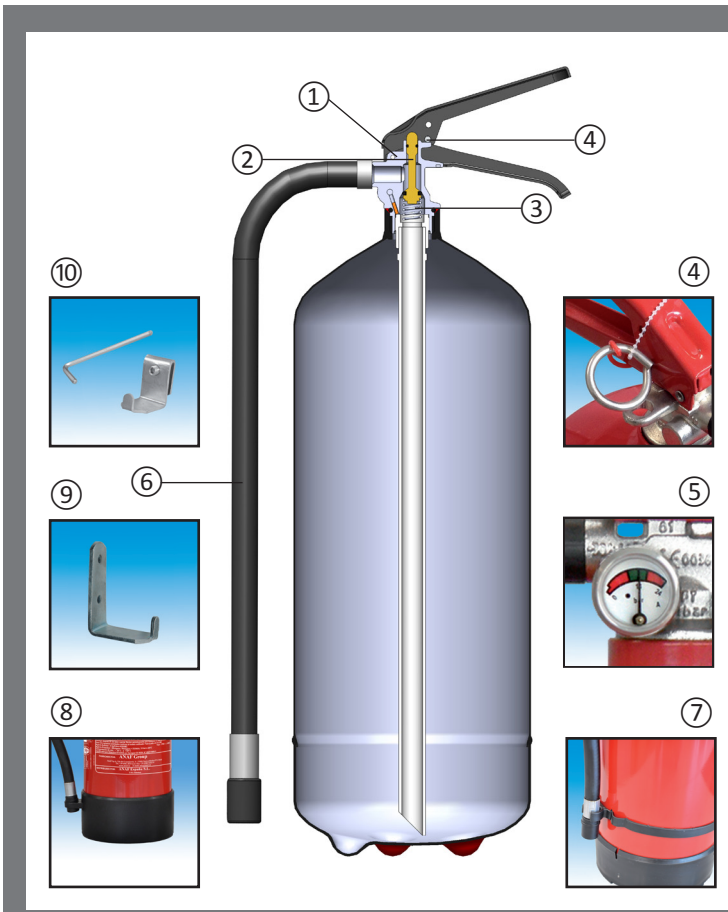

- ① The valve consists of single block brass casting.
- ② The spindle is made up of acetal resin for perfect sealing.
- ③ The spring is made of Stainless Steel.
- ④ The large diameter of the safety pin ensures an easy grip even with work gloves.
- ⑤ The shock-proof pressure gauge provides an accurate indication of pressure status of the extinguisher.
- ⑥ The rubber hose guarantees a perfect flexibility at low temperature.
- ⑦ The hose ring ensures a tight seal between the hose and the extinguisher. *
- ⑧ Protective plastic base. *
- ⑨ The wall bracket, made of steel, ensures the easy release of the fire extinguisher.
- ⑩ Versatile wall mount adaptor that allows for easy installation of several wall bracket models. *

* = NOT STANDARD BUT AVAILABLE ON REQUEST.
DATA AND CHARACTERISTICS SHOWN ON THIS TECHNICAL SPECIFICATION MAY BE MODIFIED IN ANY MOMEN WITHOUT NOTICE

ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)
Tel. 0382.4533 Fax. 0382.920279
info@anaf.eu | www.anaf.eu