

CS2-ML

CARBON DIOXIDE FIRE EXTINGUISHER

CONSTRUCTION

BODY • Single piece body made of aluminium alloy, externally painted with polyester resin, signal red RAL 3000. It is certified to the Pressure Equipment Directive 97/23/EC with CE mark.

VALVE • The valve is lever operated with nickel brass body. Front –outlet type, provided with burst disk safety relief valve.

All external valve parts are protected against corrosion. It is certified to the Pressure Equipment Directive 97/23/EC with CE mark.

EXTINGUISHING AGENT • Carbon dioxide (CO₂).

All parts in contact with the extinguishing agent are compatible with the same.

HORN • Front horn in polyamide.

BRACKET • Mild steel, zinc plated wall bracket suitable for vertical mounting. Transport bracket or extinguisher plastic box for trucks and ships available on request.

USE

Suitable for class B fires – Flammable liquids.



ALUMINIUM

CS2-ML is a carbon dioxide (CO₂) fire extinguisher with lever valve and front horn. Extended operating temperature range –30 °C + 60 °C, therefore suitable for use in low temperature countries.

Certified to the Pressure Equipment Directive PED 97/23/EC, Marine Equipment Directive MED 96/98/EC and CEN EN3. Capacity is 2 kg.

FIRE CLASSES



PRODUCT CERTIFICATION



CS2-ML


CARBON DIOXIDE FIRE EXTINGUISHER

TECHNICAL CHARACTERISTICS

MODEL:	CS2-ML	INT - ING
FIRE RATINGS:	34B	
CHARGE:	2 kg +0 -5%	
EXTINGUISHING AGENT:	CO2 (Carbon dioxide)	
DISCHARGE:	Discharge time :	~ 8 s
CYLINDER:	Material of construction :	Aluminium alloy
	Manufacturing process :	Deep drawing
	External painting :	Polyester resin, minimum thickness 75 micron
	Corrosion resistance :	480 h minimum according to ISO 9227:1990
	Horn made of polyamide.	
HOSE	Overall length :	95 mm
DIMENSIONS:	Overall height :	535 mm
	Bottle OD :	111 mm
	Empty / Charged:	3 kg / 5 kg
WEIGHT:	Standard packing :	Single piece cardboard box
PACKING SPECIFICATIONS:	Carton size : B x L x H :	155 x 135 x 630 mm
	Weight per carton :	6,4 kg
	Pc/Pallet :	80 cartons
	Pallet size : B x L x H :	800 x 1200 x 1385 mm
	Pallet volume :	1,34 m3
	Weight per pallet (net/gross):	512 kg / 532 kg

© REPRODUCTION IS FORBIDDEN

50.707B.01.08.2015

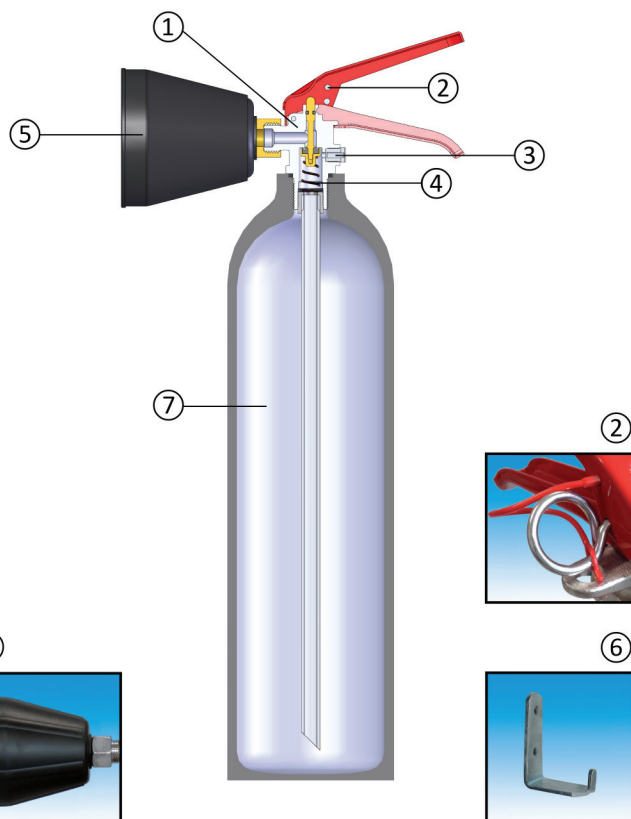

① The valve is made of one block brass casting.

② The large diameter of the safety pin ensures an easy grip even with work gloves.

③ The brass safety valve with bursting disk ensures total release in case of overpressure.

④ The spring is made of steel.

⑤ The horn is made of polyamide and provides a perfect diffusion of the extinguishing agent, ensuring a prompt extinguishing and quick cooling of the fire.

⑥ The wall bracket, made of steel, ensures the easy release of the fire extinguisher.

⑦ The aluminium alloy body ensures maximum sealing and, thanks to its light weight, perfect handling.

* = NOT STANDARD BUT AVAILABLE ON REQUEST.
DATA AND CHARACTERISTICS SHOWN ON THIS TECHNICAL SPECIFICATION MAY BE MODIFIED IN ANY MOMENT WITHOUT NOTICE

ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)
Tel. 0382.4533 Fax. 0382.920279
info@anaf.eu | www.anaf.eu